






	ACCORD COUPE	
Engineering	LX-S/EX/EX-L	EX-L V-6
Engine Type	In-Line 4-Cylinder	V-6
Engine Block/Cylinder Head	Aluminum-Alloy	Aluminum-Alloy
Displacement (cc)	2354	3471
Horsepower @ rpm (SAE net)	190 @ 7000	271 @ 6200
Torque (lb-ft@ rpm)	162 @ 4400	254 @ 5000/251 @ 5000 (6MT)
Redline	7100	6800
Bore and Stroke (mm)	87 x 99	89 x 93
Compression Ratio	10.5:1	10.5 : 1 (5AT)/10.0 : 1 (6MT)
Valve Train	16-Valve DOHC i-VTEC	24-Valve SOHC i-VTEC (5AT) 24-Valve SOHC VTEC® (6MT)
High-Performance Intake Manifold		6MT
Drive-by-Wire™ Throttle System	•	•
Variable Cylinder Management™ (VCM®)		5AT
Active Noise Cancellation™ (ANC)	•	5AT
CARB Emissions Rating ¹	ULEV-2/PZEV	ULEV-2
Direct Ignition System with Immobilizer	•	•
100K +/- Miles No Scheduled Tune-Ups*	•	•
Transmissions	·	·
5-Speed Manual Transmission		
Gear Ratios: 1st: 3.267, 2nd: 1.778, 3rd: 1.154, 4th: 0.870, 5th: 0.647, Reverse: 3.583, Final Drive Ratio: 4.39	•	
Close-Ratio 6-Speed Manual Transmission (<i>available</i>) Gear Ratios: 1st: 3.933, 2nd: 2.478, 3rd: 1.700, 4th: 1.250, 5th: 0.976, 6th: 0.771, Reverse: 4.008, Final Drive Ratio: 3.55		•
5-Speed Automatic Transmission <i>(available)</i> Gear Ratios: 1st: 2.652, 2nd: 1.614, 3rd: 1.082, 4th: 0.773,	•	
5th: 0.566, Reverse: 2.000, Final Drive Ratio: 4.44 5-Speed Automatic Transmission Gear Ratios: 1st: 2.697, 2nd: 1.606, 3rd: 1.071, 4th: 0.766,		•
5th: 0.612, Reverse: 1.889, Final Drive Ratio: 4.31		
Body/Suspension/Chassis		
Unit-Body Construction	•	•
Double Wishbone Front Suspension	•	•
		•
Independent Multi-Link Rear Suspension	•	
ndependent Multi-Link Rear Suspension	• 26.5/15.0	27.2/15.0
Independent Multi-Link Rear Suspension Stabilizer Bar <i>(mm, front/rear)</i> Front Shock Tower Bar		
Independent Multi-Link Rear Suspension Stabilizer Bar <i>(mm, front/rear)</i> Front Shock Tower Bar	26.5/15.0	27.2/15.0
Independent Multi-Link Rear Suspension Stabilizer Bar <i>(mm, front/rear)</i> Front Shock Tower Bar Variable Gear Ratio (VGR) Power-Assisted Rack-and-Pinion Steering	26.5/15.0	27.2/15.0
Independent Multi-Link Rear Suspension Stabilizer Bar (mm, front/rear) Front Shock Tower Bar Variable Gear Ratio (VGR) Power-Assisted Rack-and-Pinion Steering Steering Wheel Turns, Lock-to-Lock	26.5/15.0	27.2/15.0
Independent Multi-Link Rear Suspension Stabilizer Bar (mm, front/rear) Front Shock Tower Bar Variable Gear Ratio (VGR) Power-Assisted Rack-and-Pinion Steering Steering Wheel Turns, Lock-to-Lock Turning Diameter, Curb-to-Curb (ft)	26.5/15.0 • • 2.56	27.2/15.0 • • • 2.48
Independent Multi-Link Rear Suspension Stabilizer Bar (mm, front/rear) Front Shock Tower Bar Variable Gear Ratio (VGR) Power-Assisted Rack-and-Pinion Steering Steering Wheel Turns, Lock-to-Lock Furning Diameter, Curb-to-Curb (ft) Power-Assisted Ventilated Front Disc/Solid Rear Disc Brakes (in)	26.5/15.0 • • 2.56 37.1	27.2/15.0 • • • 2.48 38.6
Independent Multi-Link Rear Suspension Stabilizer Bar (mm, front/rear) Front Shock Tower Bar Variable Gear Ratio (VGR) Power-Assisted Rack-and-Pinion Steering Steering Wheel Turns, Lock-to-Lock Turning Diameter, Curb-to-Curb (ft) Power-Assisted Ventilated Front Disc/Solid Rear Disc Brakes (in) Wheels	26.5/15.0 • • 2.56 37.1 11.1/11.1 (LX-S), 11.8/11.1 (EX/EX-L)	27.2/15.0 • • • 2.48 38.6 11.8/11.1
Independent Multi-Link Rear Suspension Stabilizer Bar (mm, front/rear) Front Shock Tower Bar Variable Gear Ratio (VGR) Power-Assisted Rack-and-Pinion Steering Steering Wheel Turns, Lock-to-Lock Turning Diameter, Curb-to-Curb (ft) Power-Assisted Ventilated Front Disc/Solid Rear Disc Brakes (in) Wheels All-Season Tires	26.5/15.0 • • 2.56 37.1 11.1/11.1 (LX-S), 11.8/11.1 (EX/EX-L) 17" Alloy	27.2/15.0 • • • • • • • • • • • • • • • • • • •
Independent Multi-Link Rear Suspension Stabilizer Bar (mm, front/rear) Front Shock Tower Bar Variable Gear Ratio (VGR) Power-Assisted Rack-and-Pinion Steering Steering Wheel Turns, Lock-to-Lock Turning Diameter, Curb-to-Curb (ft) Power-Assisted Ventilated Front Disc/Solid Rear Disc Brakes (in) Wheels All-Season Tires Exterior Measurements	26.5/15.0 • • 2.56 37.1 11.1/11.1 (LX-S), 11.8/11.1 (EX/EX-L) 17" Alloy	27.2/15.0 • • • • • • • • • • • • • • • • • • •
Independent Multi-Link Rear Suspension Stabilizer Bar (mm, front/rear) Front Shock Tower Bar Variable Gear Ratio (VGR) Power-Assisted Rack-and-Pinion Steering Steering Wheel Turns, Lock-to-Lock Turning Diameter, Curb-to-Curb (ft) Power-Assisted Ventilated Front Disc/Solid Rear Disc Brakes (in) Wheels All-Season Tires Exterior Measurements Wheelbase (in)	26.5/15.0 • 2.56 37.1 11.1/11.1 (LX-S), 11.8/11.1 (EX/EX-L) 17" Alloy P225/50 R17 93V	27.2/15.0 • • • 2.48 38.6 11.8/11.1 18" Alloy P235/45 R18 94V
Independent Multi-Link Rear Suspension Stabilizer Bar (mm, front/rear) Front Shock Tower Bar Variable Gear Ratio (VGR) Power-Assisted Rack-and-Pinion Steering Steering Wheel Turns, Lock-to-Lock Turning Diameter, Curb-to-Curb (ft) Power-Assisted Ventilated Front Disc/Solid Rear Disc Brakes (in) Wheels All-Season Tires Exterior Measurements Wheelbase (in) Length (in)	26.5/15.0 • • 2.56 37.1 11.1/11.1 (LX-S), 11.8/11.1 (EX/EX-L) 17" Alloy P225/50 R17 93V	27.2/15.0 • 2.48 38.6 11.8/11.1 18" Alloy P235/45 R18 94V
Independent Multi-Link Rear Suspension Stabilizer Bar (mm, front/rear) Front Shock Tower Bar Variable Gear Ratio (VGR) Power-Assisted Rack-and-Pinion Steering Steering Wheel Turns, Lock-to-Lock Turning Diameter, Curb-to-Curb (ft) Power-Assisted Ventilated Front Disc/Solid Rear Disc Brakes (in) Wheels All-Season Tires Exterior Measurements Wheelbase (in) Length (in) Height (in)	26.5/15.0 • 2.56 37.1 11.1/11.1 (LX-S), 11.8/11.1 (EX/EX-L) 17" Alloy P225/50 R17 93V 107.9 190.9 56.4	27.2/15.0 • • 2.48 38.6 11.8/11.1 18" Alloy P235/45 R18 94V 107.9 190.9 56.4
Independent Multi-Link Rear Suspension Stabilizer Bar (mm, front/rear) Front Shock Tower Bar Variable Gear Ratio (VGR) Power-Assisted Rack-and-Pinion Steering Steering Wheel Turns, Lock-to-Lock Turning Diameter, Curb-to-Curb (ft) Power-Assisted Ventilated Front Disc/Solid Rear Disc Brakes (in) Wheels All-Season Tires Exterior Measurements Wheelbase (in) Length (in) Height (in) Width (in)	26.5/15.0 • 2.56 37.1 11.1/11.1 (LX-S), 11.8/11.1 (EX/EX-L) 17" Alloy P225/50 R17 93V 107.9 190.9 56.4 72.8	27.2/15.0 • 2.48 38.6 11.8/11.1 18" Alloy P235/45 R18 94V 107.9 190.9 56.4 72.8
Independent Multi-Link Rear Suspension Stabilizer Bar (mm, front/rear) Front Shock Tower Bar Variable Gear Ratio (VGR) Power-Assisted Rack-and-Pinion Steering Steering Wheel Turns, Lock-to-Lock Turning Diameter, Curb-to-Curb (ft) Power-Assisted Ventilated Front Disc/Solid Rear Disc Brakes (in) Wheels All-Season Tires Exterior Measurements Wheelbase (in) Length (in) Height (in) Midth (in)	26.5/15.0 • 2.56 37.1 11.1/11.1 (LX-S), 11.8/11.1 (EX/EX-L) 17" Alloy P225/50 R17 93V 107.9 190.9 56.4 72.8 62.2/62.2	27.2/15.0 • • 2.48 38.6 11.8/11.1 18" Alloy P235/45 R18 94V 107.9 190.9 56.4
Independent Multi-Link Rear Suspension Stabilizer Bar (mm, front/rear) Front Shock Tower Bar Variable Gear Ratio (VGR) Power-Assisted Rack-and-Pinion Steering Steering Wheel Turns, Lock-to-Lock Turning Diameter, Curb-to-Curb (ft) Power-Assisted Ventilated Front Disc/Solid Rear Disc Brakes (in) Wheels All-Season Tires Exterior Measurements Wheelbase (in) Length (in) Height (in) Width (in) Track (in, front/rear)	26.5/15.0 • 2.56 37.1 11.1/11.1 (LX-S), 11.8/11.1 (EX/EX-L) 17" Alloy P225/50 R17 93V 107.9 190.9 56.4 72.8	27.2/15.0 • 2.48 38.6 11.8/11.1 18" Alloy P235/45 R18 94V 107.9 190.9 56.4 72.8
Independent Multi-Link Rear Suspension Stabilizer Bar (mm, front/rear) Front Shock Tower Bar Variable Gear Ratio (VGR) Power-Assisted Rack-and-Pinion Steering Steering Wheel Turns, Lock-to-Lock Turning Diameter, Curb-to-Curb (ft) Power-Assisted Ventilated Front Disc/Solid Rear Disc Brakes (in) Wheels All-Season Tires Exterior Measurements Wheelbase (in) Length (in) Height (in) Width (in) Track (in, front/rear) Curb Weight (lbs, MT/AT)	26.5/15.0 • 2.56 37.1 11.1/11.1 (LX-S), 11.8/11.1 (EX/EX-L) 17" Alloy P225/50 R17 93V 107.9 190.9 56.4 72.8 62.2/62.2 3175/3245 (LX-S) 3229/3297 (EX)	27.2/15.0 • 2.48 38.6 11.8/11.1 18" Alloy P235/45 R18 94V 107.9 190.9 56.4 72.8 62.2/62.3
Independent Multi-Link Rear Suspension Stabilizer Bar (mm, front/rear) Front Shock Tower Bar Variable Gear Ratio (VGR) Power-Assisted Rack-and-Pinion Steering Steering Wheel Turns, Lock-to-Lock Turning Diameter, Curb-to-Curb (ft) Power-Assisted Ventilated Front Disc/Solid Rear Disc Brakes (in) Wheels All-Season Tires Exterior Measurements Wheelbase (in) Length (in) Height (in) Width (in) Track (in, front/rear) Curb Weight (lbs, MT/AT) Interior Measurements	26.5/15.0 • 2.56 37.1 11.1/11.1 (LX-S), 11.8/11.1 (EX/EX-L) 17" Alloy P225/50 R17 93V 107.9 190.9 56.4 72.8 62.2/62.2 3175/3245 (LX-S) 3229/3297 (EX)	27.2/15.0 • 2.48 38.6 11.8/11.1 18" Alloy P235/45 R18 94V 107.9 190.9 56.4 72.8 62.2/62.3
Independent Multi-Link Rear Suspension Stabilizer Bar (mm, front/rear) Front Shock Tower Bar Variable Gear Ratio (VGR) Power-Assisted Rack-and-Pinion Steering Steering Wheel Turns, Lock-to-Lock Turning Diameter, Curb-to-Curb (ft) Power-Assisted Ventilated Front Disc/Solid Rear Disc Brakes (in) Wheels All-Season Tires Exterior Measurements Whoelbase (in) Length (in) Height (in) Width (in) Track (in, front/rear) Lure Weight (lbs, MT/AT) Interior Measurements Headroom (in, front/rear)	26.5/15.0 • 2.56 37.1 11.1/11.1 (LX-S), 11.8/11.1 (EX/EX-L) 17" Alloy P225/50 R17 93V 107.9 190.9 56.4 72.8 62.2/62.2 3175/3245 (LX-S) 3229/3297 (EX) 3256/3327 (EX-L)	27.2/15.0 • 2.48 38.6 11.8/11.1 18" Alloy P235/45 R18 94V 107.9 190.9 56.4 72.8 62.2/62.3 3401/3522
Independent Multi-Link Rear Suspension Stabilizer Bar (mm, front/rear) Front Shock Tower Bar Variable Gear Ratio (VGR) Power-Assisted Rack-and-Pinion Steering Steering Wheel Turns, Lock-to-Lock Turning Diameter, Curb-to-Curb (ft) Power-Assisted Ventilated Front Disc/Solid Rear Disc Brakes (in) Wheels All-Season Tires Exterior Measurements Wheelbase (in) Length (in) Height (in) Width (in) Track (in, front/rear) Curb Weight (lbs, MT/AT) Interior Measurements Headroom (in, front/rear) Headroom with Moonroof (in, front/rear)	26.5/15.0 • 2.56 37.1 11.1/11.1 (LX-S), 11.8/11.1 (EX/EX-L) 17" Alloy P225/50 R17 93V 107.9 190.9 56.4 72.8 62.2/62.2 3175/3245 (LX-S) 3229/3297 (EX) 3256/3327 (EX-L) 39.1/35.9 (LX-S) 37.4/35.1 (EX/EX-L)	27.2/15.0 • 2.48 38.6 11.8/11.1 18" Alloy P235/45 R18 94V 107.9 190.9 56.4 72.8 62.2/62.3 3401/3522
Independent Multi-Link Rear Suspension Stabilizer Bar (mm, front/rear) Front Shock Tower Bar Variable Gear Ratio (VGR) Power-Assisted Rack-and-Pinion Steering Steering Wheel Turns, Lock-to-Lock Turning Diameter, Curb-to-Curb (ft) Power-Assisted Ventilated Front Disc/Solid Rear Disc Brakes (in) Wheels All-Season Tires Exterior Measurements Wheelbase (in) Length (in) Height (in) Width (in) Track (in, front/rear) Curb Weight (lbs, MT/AT) Interior Measurements Headroom with Moonroof (in, front/rear) Legroom (in, front/rear)	26.5/15.0 • • 2.56 37.1 11.1/11.1 (LX-S), 11.8/11.1 (EX/EX-L) 17" Alloy P225/50 R17 93V 107.9 190.9 190.9 56.4 72.8 62.2/62.2 3175/3245 (LX-S) 3229/3297 (EX) 3256/3327 (EX-L) 39.1/35.9 (LX-S) 37.4/35.1 (EX/EX-L) 42.2/33.1	27.2/15.0 • 2.48 38.6 11.8/11.1 18" Alloy P235/45 R18 94V 107.9 190.9 56.4 72.8 62.2/62.3 3401/3522
Independent Multi-Link Rear Suspension Stabilizer Bar (mm, front/rear) Front Shock Tower Bar Variable Gear Ratio (VGR) Power-Assisted Rack-and-Pinion Steering Steering Wheel Turns, Lock-to-Lock Furning Diameter, Curb-to-Curb (ft) Power-Assisted Ventilated Front Disc/Solid Rear Disc Brakes (in) Wheels All-Season Tires Exterior Measurements Wheelbase (in) Length (in) Height (in) Frack (in, front/rear) Curb Weight (lbs, MT/AT) Interior Measurements Headroom (in, front/rear) Headroom with Moonroof (in, front/rear) Legroom (in, front/rear) Shoulder Room (in, front/rear) Shoulder Room (in, front/rear)	26.5/15.0 • • 2.56 37.1 11.1/11.1 (LX-S), 11.8/11.1 (EX/EX-L) 17" Alloy P225/50 R17 93V 107.9 190.9 190.9 56.4 72.8 62.2/62.2 3175/3245 (LX-S) 3229/3297 (EX) 3256/3327 (EX-L) 39.1/35.9 (LX-S) 37.4/35.1 (EX/EX-L) 42.2/33.1 55.4/54.5	27.2/15.0 • 2.48 38.6 11.8/11.1 18" Alloy P235/45 R18 94V 107.9 190.9 56.4 72.8 62.2/62.3 3401/3522
Independent Multi-Link Rear Suspension Stabilizer Bar (mm, front/rear) Front Shock Tower Bar Variable Gear Ratio (VGR) Power-Assisted Rack-and-Pinion Steering Steering Wheel Turns, Lock-to-Lock Turning Diameter, Curb-to-Curb (ft) Power-Assisted Ventilated Front Disc/Solid Rear Disc Brakes (in) Wheels All-Season Tires Exterior Measurements Wheelbase (in) Length (in) Height (in) Width (in) Track (in, front/rear) Curb Weight (lbs, MT/AT) Interior Measurements Headroom (in, front/rear) Headroom with Moonroof (in, front/rear) Legroom (in, front/rear) Hiproom (in, front/rear) Hiproom (in, front/rear) Hiproom (in, front/rear)	26.5/15.0 • • 2.56 37.1 11.1/11.1 (LX-S), 11.8/11.1 (EX/EX-L) 17" Alloy P225/50 R17 93V 107.9 190.9 56.4 72.8 62.2/62.2 3175/3245 (LX-S) 3229/3297 (EX) 3256/3327 (EX-L) 39.1/35.9 (LX-S) 37.4/35.1 (EX/EX-L) 42.2/33.1 55.8.4/54.5 56.4/46.3	27.2/15.0 • 2.48 38.6 11.8/11.1 18" Alloy P235/45 R18 94V 107.9 190.9 56.4 72.8 62.2/62.3 3401/3522 37.4/35.1 42.2/33.1 58.4/54.5 56.4/46.3
Independent Multi-Link Rear Suspension Stabilizer Bar (mm, front/rear) Front Shock Tower Bar Variable Gear Ratio (VGR) Power-Assisted Rack-and-Pinion Steering Steering Wheel Turns, Lock-to-Lock Turning Diameter, Curb-to-Curb (ft) Power-Assisted Ventilated Front Disc/Solid Rear Disc Brakes (in) Wheels All-Season Tires Exterior Measurements Wheelbase (in) Length (in) Height (in) Width (in) Track (in, front/rear) Curb Weight (Ibs, MT/AT) Interior Measurements Headroom (in, front/rear) Headroom with Moonroof (in, front/rear) Legroom (in, front/rear) Shoulder Room (in, front/rear) Hiproom (in, front/rear) Cargo Volume (cu ft)	26.5/15.0 • 2.56 37.1 11.1/11.1 (LX-S), 11.8/11.1 (EX/EX-L) 17" Alloy P225/50 R17 93V 107.9 190.9 56.4 72.8 62.2/62.2 3175/3245 (LX-S) 3229/3297 (EX) 3256/3327 (EX-L) 39.1/35.9 (LX-S) 37.4/35.1 (EX/EX-L) 42.2/33.1 58.4/54.5 56.4/46.3 11.9	27.2/15.0 • 2.48 38.6 11.8/11.1 18" Alloy P235/45 R18 94V 107.9 190.9 56.4 72.8 62.2/62.3 3401/3522 37.4/35.1 42.2/33.1 58.4/46.5 56.4/46.3 11.9
Independent Multi-Link Rear Suspension Stabilizer Bar (Imm, Front/rear) Front Shock Tower Bar Variable Gear Ratio (VGR) Power-Assisted Rack-and-Pinion Steering Steering Wheel Turns, Lock-to-Lock Turning Diameter, Curb-to-Curb (ft) Power-Assisted Ventilated Front Disc/Solid Rear Disc Brakes (in) Wheels All-Season Tires Exterior Measurements Wheelbase (in) Length (in) Height (in) Width (in) Track (in, front/rear) Curb Weight (Ibs, MT/AT) Interior Measurements Headroom (in, front/rear) Legroom (in, front/rear) Hegroom (in, front/rear) Hiproom (in, front/rear) Hiproom (in, front/rear) Hiproom (in, front/rear)	26.5/15.0 • • 2.56 37.1 11.1/11.1 (LX-S), 11.8/11.1 (EX/EX-L) 17" Alloy P225/50 R17 93V 107.9 190.9 56.4 72.8 62.2/62.2 3175/3245 (LX-S) 3229/3297 (EX) 3256/3327 (EX-L) 39.1/35.9 (LX-S) 37.4/35.1 (EX/EX-L) 42.2/33.1 55.8.4/54.5 56.4/46.3	27.2/15.0 • 2.48 38.6 11.8/11.1 18" Alloy P235/45 R18 94V 107.9 190.9 56.4 72.8 62.2/62.3 3401/3522 37.4/35.1 42.2/33.1 58.4/54.5 56.4/46.3

^{*}Does not apply to fluid and filter changes. May vary with driving conditions. Please see your Honda dealer for details.

	ACCORD COUPE	
Safety	LX-S/EX/EX-L	EX-L V-6
3-Point Seat Belts at All Seating Positions	·	•
Front 3-Point Seat Belts with Automatic Tensioning System	•	•
Driver's and Front Passenger's Seat Belt Reminder	•	•
Dual-Stage, Multiple-Threshold Front Airbags (SRS)	•	•
Dual-Chamber Front Side Airbags with Passenger-Side	•	•
Occupant Position Detection System (OPDS)		
Side Curtain Airbags	•	•
Driver's and Front Passenger's Active Head Restraints Advanced Compatibility Engineering™ (ACE™) Body Structure	•	•
Vehicle Stability Assist™ (VSA®) with Traction Control	•	•
Brake Assist	•	•
Tire Pressure Monitoring System ² (TPMS)	•	•
Anti-Lock Braking System (ABS) with Electronic Brake Distribution (EBD)	•	•
Daytime Running Lights (DRL)	•	•
Side-Impact Door Beams	•	•
Lower Anchors and Tethers for Children (LATCH):	•	•
Lower Anchors (2nd-Row Outboard), Tether Anchors (2nd-Row All)	•	•
Emergency Trunk Release Exterior Features	·	
One-Touch Power Moonroof with Tilt Feature	EX/EX-L	•
Integrated Rear Window Antenna	• •	•
Security System	•	•
Remote Entry System with Power Window Control	•	•
Variable Intermittent Windshield Wipers	•	•
Projector-Beam Halogen Headlights with Auto-Off	with Auto-On/Off (EX-L)	with Auto-On/Off
Hood Struts		•
Body-Colored Rear Decklid Spoiler		•
Fog Lights Park Calcad Para Handler	•	Channa
Body-Colored Door Handles Body-Colored Power Side Mirrors	Heated (EX/EX-L)	Chrome Heated
Chrome Exhaust Finisher	neateu (EA/ EA-L) ●	Dual Exhaust
Chrome Window Trim	•	•
EPA Mileage Estimates³/Capacities		
5-Speed Manual (City/Highway/Combined)	22/31/25	
6-Speed Manual (City/Highway/Combined)		17/25/20
5-Speed Automatic (City/Highway/Combined)	21/31/25	19/28/22
Crankcase (qt)	5.6	5.3
Coolant System (qt, MT/AT) Fuel (gal)	8.6/8.5 18.5	NA/9.1 18.5
Required Fuel	Regular Unleaded	Regular Unleaded
Comfort & Convenience	nogular omedaca	nogalar omeaded
Air Conditioning with Air-Filtration System	LX-S/EX	
Dual-Zone Automatic Climate Control System	EX-L	•
Honda Satellite-Linked Navigation System™ with Voice Recognition	Available (EX-L)	Available
Bluetooth®5 HandsFreeLink®	EX-L	•
Interface Dial with Scrolling and Multi-Line Display	with Navigation	with Navigation
Selector Knob with Scrolling and Multi-Line Display Power Windows with Auto-Up/Down Driver's Window	• LX-S	•
Power Windows with Auto-Up/Down Driver's and Front Passenger's Windows	EX/EX-L	•
Illuminated Power Window Switches	EX/EX-L	•
Power Door Locks/Programmable Auto-Locking Doors	•	•
Cruise Control	•	•
Leather-Wrapped Steering Wheel	EX-L	•
Leather-Wrapped Shift Knob	EX-L 5MT	6MT
Illuminated Steering Wheel-Mounted Audio and Cruise Controls	•	20.81
Steering Wheel-Mounted Navigation Controls Steering Wheel Mounted Phase Controls	with Navigation	with Navigation
Steering Wheel-Mounted Phone Controls Tilt and Telescopic Steering Column	EX-L •	•
HomeLink® Remote System ⁶	•	•
Premium Interior Accents	EX/EX-L	•
Center Console with Sliding Armrest and Storage Compartments	•	•
Beverage Holders, Front and Rear	•	•
Driver's and Front Passenger's Illuminated Vanity Mirrors	•	•
Map Lights/Sunglasses Holder	•	•

	ACCORD COUPE	
Comfort & Convenience (continued)	LX-S/EX/EX-L	EX-L V-6
Coin Box	•	•
12-Volt Power Outlets	•	•
Lockable Glove Compartment	•	•
Driver- and Passenger-Side Seatback Pockets	•	•
Remote Fuel Filler Door Release	•	•
Remote Trunk Release with Lock	•	•
Electronic Remote Trunk Release	•	•
Rear Window Defroster	•	•
Cargo Area Light	•	•
Side Door Pockets	•	•
Seating		
Driver's Seat with 10-Way Power Adjustment Including Power Lumbar Support	EX-L	•
Driver's Seat with Manual Height Adjustment	LX-S/EX	
Leather-Trimmed Seats	EX-L	•
Heated Front Seats	EX-L	•
Passenger-Side Walk-In Feature	•	•
Fold-Down Rear Seatback	•	•
Audio Systems		
160-Watt AM/FM/6-Disc In-Dash Audio System with 6 Speakers	LX-S	
270-Watt AM/FM/6-Disc In-Dash Premium Audio System	EX/EX-L	•
with 7 Speakers, Including Subwoofer	EA/EA-L	•
Radio Data System (RDS)	•	•
MP3/Windows Media® Audio ⁷ (WMA) Playback Capability	•	•
MP3/Auxiliary Input Jack	•	•
XM® Radio ⁸	EX-L	•
Speed-Sensitive Volume Control (SVC)	•	•
Instrumentation		
Backlit Gauges	•	•
Tachometer	•	•
Digital Odometer and Digital Trip Meters (2)	•	•
Maintenance Minder System	•	•
Compass	EX-L without Navigation	without Navigation
Door- /Trunk-Open Indicator	•	•
Fuel and Coolant Temperature Indicators	•	•
Exterior Temperature Indicator	EX-L	•

IMT and V-6 models are ULEV-2-rated by the California Air Resources Board (CARB) and are available in all 50 states. 4-cylinder AT models are certified as PZEV (Partial Zero-Emission Vehicle) by California Air Resources Board (CARB) and are available in California and states that have adopted California Zero-Emission Vehicle equilations. ²For optimal tire wear and performance, tire pressure should be checked regularly with a gauge. Do not rely solely on the monitor system. Please see your Honda dealer for details. ³Based on 2010 EPA mileage estimates, which reflect the new EPA (queenomy methods beginning with 2008 models. Use for comparison purposes only. Do not compare to models before 2008. Your actual mileage will vary depending on how you drive and maintain your vehicle. ⁴The Honda Statellite-Linked Navigation System^{**} is available on EX-L models in the United States, except Alaska. Please see your Honda dealer for details. ⁵The Bluetooth[®] word mark and logos are owned by the Bluetooth SIG, Inc., and any use of such marks by Honda Motor Co., Ltd., is under license. ⁸HomeLink and the HomeLink house are registered trademarks of Johnson Controls. ⁹ 'Windows Media' is a trademark or registered trademark of Microsoft Corporation in the United States and/or other countries. ⁸Required XM Radio subscriptions are governed by the XM Customer Agreement available in Canada, Alaska, or Hawaii. [©] 2009 SIRIUS XM Radio Inc. SIRIUS, XM and all related marks and logos are trademarks of SIRIUS XM Radio Inc. and its subsidiaries. ⁸3-Year/36,000-Mile Limited Warranty. 5-Year/60,000-Mile Limited Powertrain Warranty. Ordinary maintenance or adjustments, parts subject to normal wear and replacement, and certain items are excluded. Please see your Honda dealer for details. ¹⁰ Kelley Blue Book Sc., Inc. ¹¹ Based on 2009 Civic, the 2009 Civic by Control of Powertrain

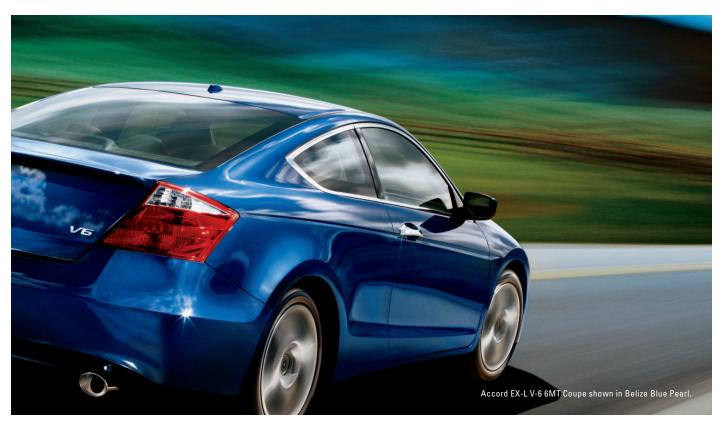



Whether you buy or lease a Honda vehicle, Honda Financial Services can assist you with the process. Please ask your dealer which lease or purchase plan best suits your needs.

Care

Honda Care® is an affordable, comprehensive vehicle and travel protection plan backed by Honda reliability, service and parts. Please see your Honda dealer for details.



Your dealer's team of trained technicians is at the ready to help keep your Honda in superb shape. All 2010 Honda vehicles – and any Honda Genuine Accessories installed at the time of vehicle purchase –

are covered by the 3-year/36,000-mile New-Vehicle Limited Warranty! Plus, Honda cars and trucks are covered by a 5-year/60,000-mile Limited Powertrain Warranty, too! For more information or assistance, see your Honda dealer or please give us a call at 1-800-33-Honda.

Every Honda is a smart value thanks to timeless design, great reliability and extended maintenance intervals. Check out our Best Overall Brand Award and Best Resale Value

Awards¹⁰ from Kelley Blue Book's kbb.com, Best
Overall Value Awards from IntelliChoice⁸¹¹ and –
for our sixth year in a row-Industry Best Residual
Value Award from *Automotive Lease Guide*!²













Want your own look? Ask your dealer about Honda Genuine Accessories. They're designed, engineered and tested to meet the same exacting standards as your new vehicle—and a high-quality way to make your new Honda a reflection of your one-of-a-kind personality.