

FM•MR



1998



SPECIFICATIONS

WEIGHT (LBS.)

Max GVWR		25,995
	Front	10,640
	Rear	16,500
Body/Payload		Up to 16,780

DIMENSIONS (IN.)

Wheelbase		181.9/200.0/218.5/230.3
Usable cab to rear axle		146.6/164.7/183.2/195.0
Overall length (End of frame)		313.8/340.6/368.1/390.6



ENGINE

Model		Mitsubishi 6D16-2AT3 (MT) 6D16-2AT4 (AT)
Type		4-stroke cycle, watercooled, direct injection, turbocharged, intercooled diesel
No. of cylinders		Six in-line
Piston displacement		460.3 cu. in. (7.5 liters)
Max. output (SAE, gross)		200 hp/2,600 rpm (MT) 190 hp/2,600 rpm (AT)
Max. torque (SAE, gross)		429 lb.ft./1,600 rpm (MT) 408 lb.ft./1,600 rpm (AT)
Air cleaner		Dry paper element with snorkel and rain cap
Starter		12-volt
Alternator		12-volt, 80 amp.

CHASSIS

Clutch		Hydraulic control, coil spring, 13.8 in., single cerametallic disc
Transmission (Automatic option)		6 forward and 1 reverse speed, 2nd to 6th synchromesh, 1st and reverse constant mesh gears
	Ratio: 6-speed OID	6.875/4.189/2.460/1.542/1.000/0.786, reverse 6.875
	Ratio: automatic	(Allison AT545) 3.454/2.253/1.407/1.000, reverse 5.024
Axle	Front	Reverse Elliot, I-beam-type, 10,800 lbs. capacity
	Rear	Full-floating-type, 20,280 lbs. capacity
Final reduction gear		Single-reduction hypoid gear
	Ratio	5.857 (MT) 4.875 (AT)
Tires		Single front, dual traction rear
	Size	Premium 11R22.5 (14PR)
Steering		Ball-nut-type with integral-type hydraulic power booster. Telescopic and tilt steering column with steering lock
Suspension	Front	Laminated leaf springs with shock absorbers
	Rear	Laminated leaf springs
Brakes	Service	Air-over hydraulic, self-adjusting air dryer standard (exhaust brake standard except automatic)
	Parking	Internal expanding-type on propeller shaft
Fuel tank		50-gallon tank and fuel/water separator (standard)
Electrical system		Two 12-volt, maintenance-free batteries
Cab		Tilt cab

FM•MR

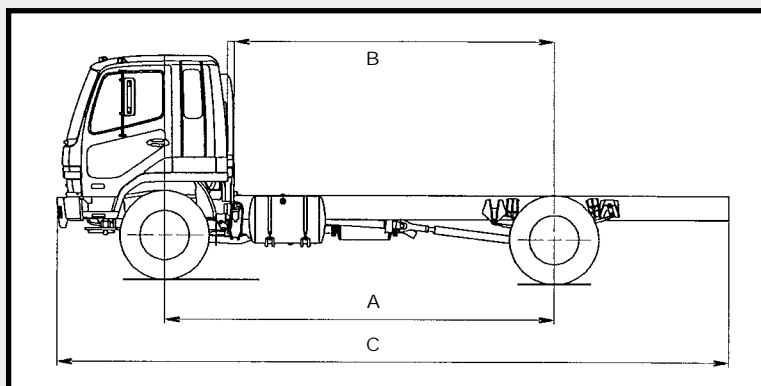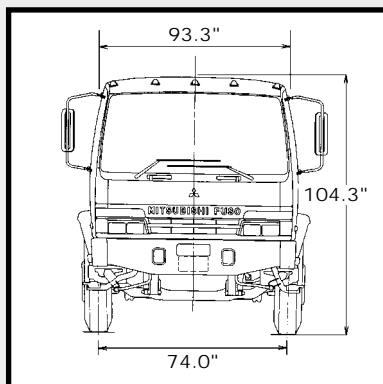

A. Wheelbase (in.)	181.9/200.0/218.5/230.3
B. Usable cab to rear axle (in.)	146.6/164.7/183.2/195.0
C. Overall length (in.)	313.8/340.6/368.1/390.6

MITSUBISHI FUSO
TRUCK OF AMERICA, Inc.

P.O. Box 464, 100 Center Square Road
Bridgeport, NJ 08014

Vehicle specifications are subject to
change without notice.

Photos and descriptions may vary in
comparison to actual vehicle models.

