

SPRINTER CARGO VAN



HAUL MORE OF THE WORLD AROUND YOU.



*Properly secure all cargo



Take your office, your warehouse, your workshop or even your showroom with you in a van designed to do more. The Freightliner Sprinter Cargo Van offers Best-In-Class¹ payload capacity of up to 5,375 lbs., Best-In-Class¹ cargo capacity of up to 547 cu. ft., Best-In-Class¹ rear and side door opening areas and Best-In-Class¹ standing height of 6'4". So do more with more in the Freightliner Sprinter.

Powered by a new 3.0 liter V6 turbo with BlueTEC SCR diesel technology, the Sprinter delivers incredible fuel economy and impressive power from one of the world's cleanest diesel engines². Add in state-of-the-art safety features like Adaptive ESP[®] with Load Adaptive Control & Roll Over Mitigation, ESP[®] Trailer Stability Assist³ and our unique Cargo Protection load-securing & lashing system, and you've got a van that delivers peace of mind. From top to bottom, the Sprinter Cargo Van is engineered to work smart for you.





SPRINTER

FreightlinerSprinterUSA.com



SPRINTER CARGO VAN

2 ROOF HEIGHTS – 3 VEHICLE LENGTHS – 3 GVWRs

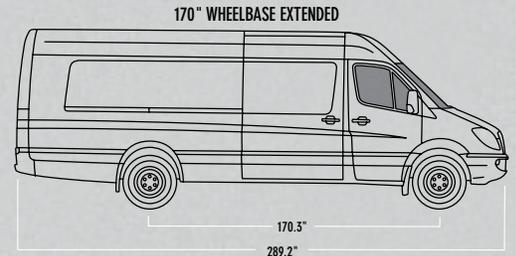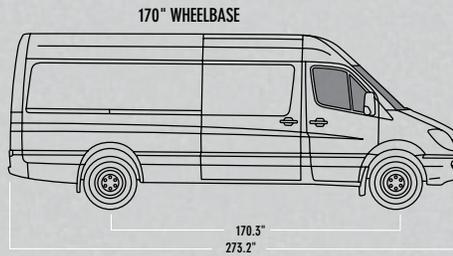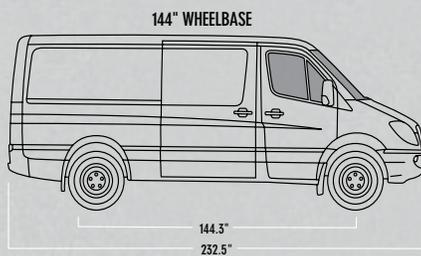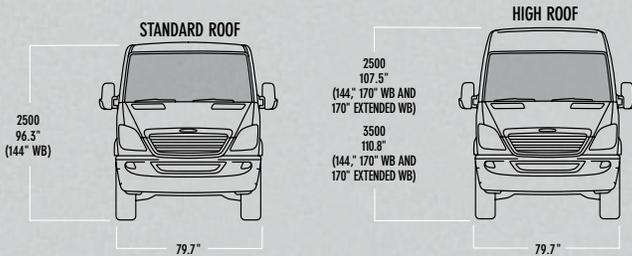

POWERTRAIN SPECIFICATIONS

BlueTEC SCR Diesel engine with AdBlue®²
 EPA / CARB 2010 Compliant
 6-cylinder, V 72°
 4 valves per cylinder
 Displacement 2,987 cc
 188 hp at 3,800 rpm
 Rated torque 325 lb-ft at 1,400–2,400 rpm
 Rear-wheel drive
 5-speed automatic transmission
 Fuel type: Ultra low sulfur diesel
 Tank capacity 26.4 gallons
 Electronically controlled direct injection with common rail
 Turbocharger and intercooler function
 Battery 12 V/100 Ah, alternator 220 A

SELECTED OPTIONAL EQUIPMENT PACKAGES

Cargo Package
 Cold Climate Package
 Comfort Seating Package
 Contractor Package
 Heavy Duty Front Axle Package
 Heavy Duty Suspension Packages I, II, III & IV
 High Performance Air Conditioning Package
 Interior Lighting Package
 Lighting Package
 Mobility Prep Package
 PARKTRONIC Package
 Partition with Sliding Door Package
 Trailer Hitch Package
 Walkthrough Package

	2500 STANDARD		2500 HIGH ROOF			3500 HIGH ROOF					
	144" WB	144" WB	144" WB	170" WB	170" WB EXT	144" WB	170" WB	170" WB EXT	170" WB EXT		
TURNING DIAMETER (FT) WALL TO WALL	47.6	47.6	54.6	54.6	54.6	47.6	54.6	54.6	54.6		
GROUND TO SLIDING DOOR STEP — SIDE	20.2	20.2	19.9	19.9	19.9	22.0	21.2	21.2	21.2		
LOAD HEIGHT — REAR	27.6	27.6	27.4	27.4	27.2	31.1	30.9	30.9	30.9		
DOOR OPENING HEIGHT — SIDE	59.8	71.7	71.7	71.7	71.7	71.7	71.7	71.7	71.7		
DOOR OPENING HEIGHT — REAR	60.6	72.4	72.4	72.4	72.4	72.4	72.4	72.4	72.4		
DOOR OPENING WIDTH — SIDE	51.2	51.2	51.2	51.2	51.2	51.2	51.2	51.2	51.2		
DOOR OPENING WIDTH — REAR	61.6	61.6	61.6	61.6	61.6	61.6	61.6	61.6	61.6		
CARGO BED LENGTH	128.5	128.5	169.3	185.0	185.0	128.5	169.3	185.0	185.0		
CARGO WIDTH AT WHEELHOUSE	53.1	53.1	53.1	53.1	53.1	38.5	38.5	38.5	38.5		
MAXIMUM WIDTH AT FLOOR	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1	70.1		
INTERIOR HEIGHT	65.0	76.4	76.4	76.4	76.4	76.4	76.4	76.4	76.4		
CARGO VOLUME (CU FT)	318	371	494	547	547	371	494	547	547.0		
MAXIMUM AVAILABLE GVWR (LB)	8,550	8,550	8,550	8,550	8,550	GVWR 9,990	GVWR 11,030 ⁴	GVWR 9,990	GVWR 11,030 ⁴	GVWR 9,990	GVWR 11,030 ⁴
BASE CURB WEIGHT (LB)	5,081	5,148	5,545	5,678	5,678	5,666	5,655	6,085	6,074	6,196	6,185
MAXIMUM PAYLOAD (LB)	3,469	3,402	3,005	2,872	2,872	4,324	5,375	3,905	4,956	3,794	4,845
MAXIMUM AVAILABLE GCWR (LB)	13,550	13,550	13,550	13,550	13,550	14,990	15,250	14,990	15,250	14,990	15,250
MAXIMUM TOWING (LB)	5,000	5,000	5,000	5,000	5,000	5,000	5,000	5,000	5,000	5,000	5,000
FUEL TANK CAPACITY (GAL)	26.4	26.4	26.4	26.4	26.4	26.4	26.4	26.4	26.4	26.4	26.4

INCHES UNLESS OTHERWISE NOTED

Some specifications and features shown or mentioned in this brochure are optional and only available upon request at extra cost. Specifications are subject to change without notice.

¹ Based on a comparison of the Automotive News classification of full size commercial vans.

² Requires the use of ultra-low-sulfur diesel fuel. Freightliner Sprinter approves the use of B5 biodiesel (approved diesel fuel with a maximum 5% biodiesel content) in all BlueTEC engines. The only approved biodiesel content is one that both meets ASTM D6751 specifications and has the oxidation stability necessary to prevent deposit-/corrosion-related damages to the system (min. 6h, proven by EN14112 method). Please see your service station for further information. If the B5 biodiesel blend does not clearly indicate that it meets the above standards, please do not use it. The Freightliner Sprinter New Vehicle Limited Warranty does not cover damage caused by non-Freightliner approved fuel standards.

³ No system, regardless of how advanced, can overcome the laws of physics or correct careless driving. Please always wear your seat belt. Performance is limited by available traction, which snow, ice and other conditions can affect. Always drive carefully, consistent with conditions. Best performance in snow is obtained with winter tires. Read Operator's Manual before towing. In some states, aftermarket trailer brakes are required. See dealer for details.

⁴ Optional or part of an Option Package.

Warning: the forces of a deploying air bag can cause serious or fatal injuries to a child under age 13. See operator's manual for additional warnings and information on air bags, seat belts and child seats.

© 2010 Daimler Vans USA LLC: One Mercedes Drive, Montvale, NJ 07645 · 1-877-762-8267 · www.freightlinersprinterusa.com

SFL-10-867 Printed in U.S.A.

SPRINTER

FreightlinerSprinterUSA.com

